


PROFILELIGHT LED

Task area lamp up to 6 m in length

PLEASE READ INSTALLATION INSTRUCTIONS
CAREFULLY BEFORE COMMISSIONING!

Installation instruction

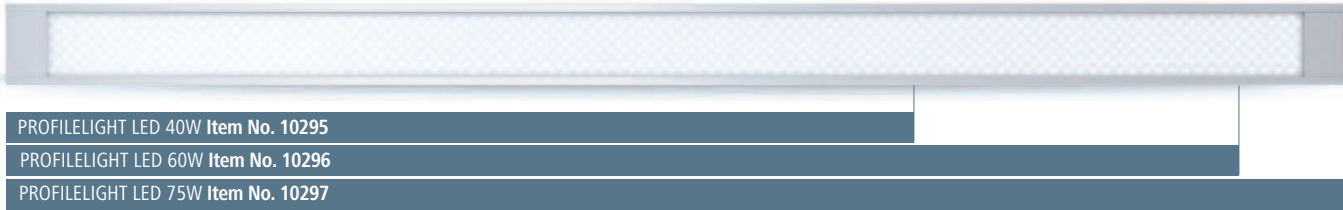

PROFILELIGHT LED 40W Item No. 10295

PROFILELIGHT LED 60W Item No. 10296

PROFILELIGHT LED 75W Item No. 10297



PROFILELIGHT LED 33W Item No. 10298

PROFILELIGHT LED 66W Item No. 10299

PROFILELIGHT LED 99W Item No. 10300


TECHNICAL DATA (these are typical values which can deviate in series production)

Type designation:	L x W x H:	Operating voltage:	Power:	Illuminated area:	Temperature range:	Weight:	Light colour:
PROFILELIGHT LED 40W	850 x 74 x 28 mm*	24 VDC	40 W	800 x 62 mm/120°	-20°C to +45°C	2.00 kg	Bright daylight white
PROFILELIGHT LED 60W	1250 x 74 x 28 mm*	24 VDC	60 W	1200 x 62 mm/120°	-20°C to +45°C	2.90 kg	Bright daylight white
PROFILELIGHT LED 75W	1550 x 74 x 28 mm*	24 VDC	75 W	1500 x 62 mm/120°	-20°C to +45°C	3.60 kg	Bright daylight white
PROFILELIGHT LED 33W	400 x 144 x 28 mm*	24 VDC	33 W	350 x 132 mm/120°	-20°C to +45°C	1.80 kg	Bright daylight white
PROFILELIGHT LED 66W	750 x 144 x 28 mm*	24 VDC	66 W	700 x 132 mm/120°	-20°C to +45°C	3.40 kg	Bright daylight white
PROFILELIGHT LED 99W	1100 x 144 x 28 mm*	24 VDC	99 W	1050 x 132 mm/120°	-20°C to +45°C	5.00 kg	Bright daylight white


*excl. cable gland, customised length on request

FIXING CENTRES

Mounting of the lamp through slot nuts (W x H: 9 x 4 mm M5)

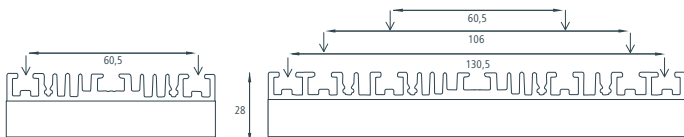


PROFILELIGHT LED DIMENSIONS

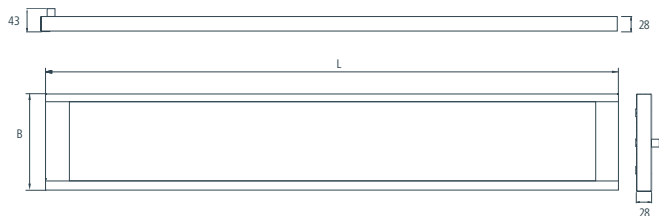


LAMP HOLDER DIMENSIONS

Lamp holder complete with 2 slot nuts


Item no. 10301




Item no. 10302

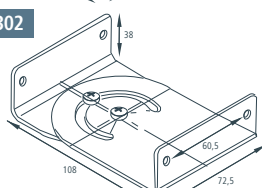


Item no. 10303

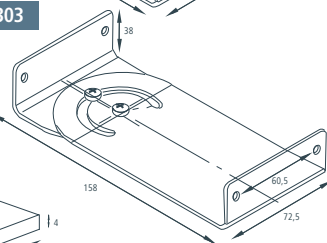

M5 slot nut enlarged:



CABLE CONNECTION



Flexible connection cable:
2 x 1.0 mm² (AWG 16),
L = ca. 2300 mm, Ø = 5.7 +/- 0.4 mm

Direct connection to the mains voltage damages the light!

IMPORTANT NOTES

Installation with lamp holders or with slot nuts.

Keep lamp wire as short as possible.

The cable gland must not be opened (marking with sealing wax).
If the sealing wax is broken, the warranty expires.

The lamp is suitable for direct mounting on normal flammable surfaces.

RoHS compliant, observe WEEE directive for waste electrical and electronic equipment.

All types have the protection class III (SELV), IP protection class IP54 and CE approval.

Standards: IEC 60598-1, IEC 60598-2-1

A detailed installation guide can be found under: www.hagnleone-leuchten.com



PROFILE
LIGHT LED

HAGN LEONE GMBH

Bobletten 25, 6850 Dornbirn, Austria

T 0043 (0)5572 39444 - 0

www.hagnleone-leuchten.com